

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
21 August 2003 (21.08.2003)

PCT

(10) International Publication Number  
**WO 03/069547 A1**

(51) International Patent Classification<sup>7</sup>: **G06K 11/18, G06F 3/033** (74) Agent: AWAPATENT AB; Box 5117, S-200 71 Malmö (SE).

(21) International Application Number: PCT/SE03/00241 (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 12 February 2003 (12.02.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:  
0200419-0 12 February 2002 (12.02.2002) SE

(71) Applicant (for all designated States except US): ANOTO AB [SE/SE]; Scheelevägen 19C, S-223 70 Lund (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BURSTRÖM, Stefan [SE/SE]; Kämnärsvägen 8B:201, S-226 45 Lund (SE). BRYBORN, Mattias [SE/SE]; Karl den XII gatan 16 A, S-222 20 Lund (SE). GREDINGER, Peter [SE/SE]; Näsbyholm 14, SE-274 94 Skurup (SE). STRÖMBERG, Ola [SE/SE]; Kornheddinge 3, S-245 91 Staffanstorp (SE). HORRDIN, Magnus [SE/SE]; Rotundan 41, SE-246 50 Löddeköpinge (SE).


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,

[Continued on next page]

(54) Title: ELECTRONIC PEN, AND CONTROL DEVICE AND METHOD THEREOF

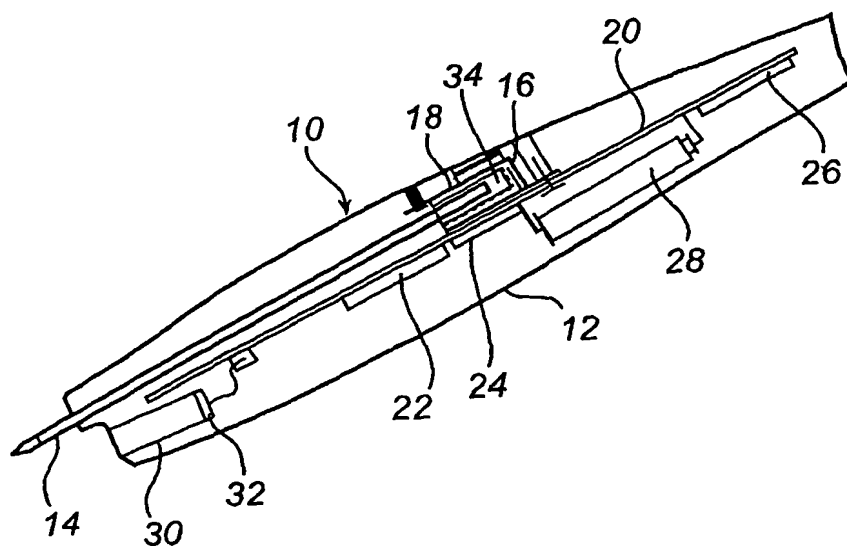

(57) Abstract: An electronic pen (10) has a force sensor (16) whose electrical resistance varies in accordance with the amount of force applied to the pen stem (14) of the pen. The force sensor (16) is a modular unit with an electrode and a closure, which are mutually arranged in an essentially electrically insulated initial position. The closure, which conveniently is cantilevered on the electrode, is adapted to receive axial forces from the pen stem (14) and thereby to be urged to an activated position in electrical contact with the electrode. The closure is also arranged, on relaxation of the axial forces, to automatically spring from the activated position back to the initial position. A control device is used in

a method for controlling the pen based on an analog measuring signal from the force sensor (16) by a processor (22) comparing the analog measuring signal with a fixed reference signal and, based on the comparison, selectively initiating conversion of the analog measuring signal into a sequence of digital force values.

WO 03/069547 A1



KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

ELECTRONIC PEN, AND CONTROL DEVICE AND  
METHOD THEREOF

Field of the Invention

The present invention relates generally to electronic pens for recording of handwritten information.

Background Art

5        Electronic pens have been developed as a complement to keyboards and mice for controlling computer-based systems and inputting information to them. Such a pen is associated with an internal and/or external position detector which electronically records the pattern of  
10        movements of the pen over a base and generates an electronic copy thereof, below referred to as electronic handwriting.

      The position detector can be based on, for instance, recording of a position-coding pattern on the base,  
15        mechanical detection of movements, use of accelerometers and/or gyroscopes, triangulation of electromagnetic or acoustic signals, pressure detection in the base, recording of changes in an electromagnetic field, or a combination of such techniques.

20        In many electronic pens, the position detector is activated based on an output signal from a pressure sensor which is mechanically connected to the pen stem to detect when the pen is made to abut against a base.

      When reproducing electronic handwriting on a display  
25        or a base, readability is frequently dependent on the fact that the reproduction also reflects dynamic parameters of the handwriting, such as the force of application of the pen stem during writing. The above pressure sensor should thus be designed to emit an output signal  
30        that is representative of the force of application.

      An electronic pen of this type is known from e.g. US-B1-6,252,182. The pen has a pen stem whose inner end is connected with a control block which is slidably

received in a cylindrical cavity in the body of the pen. Opposite to the control block, there is arranged in the cavity an electrode plate with an inner circular conductor and an outer helical conductor. A helical spring is  
5 arranged round the control block in the cavity for biasing the same away from the electrode element into abutment against a stop lug. On its side facing the electrode element, the control block has a pointed application element of conductive rubber. In an unloaded initial position,  
10 the application element with its point is received in a central guide hole in the electrode element and is in electrical contact with the circular conductor. When exerting a load on the pen stem, the application element is gradually urged against the electrode plate so that  
15 the contact surface between them increases, whereby the electrical resistance over the electrode plate gradually changes. Based on the voltage across the electrode plate, a measure of the pen stem's application force on a base is thus obtained.

20 A pen of the above construction, however, suffers from several drawbacks.

The sensor arrangement of the pen is relatively complicated to assemble, which makes production as well as repair and maintenance difficult and expensive.

25 Moreover the sensor arrangement of the pen will probably have a limited life by the point of the application element being quite heavily worn when cooperating with the guide hole in the electrode plate.

A further drawback is that the characteristics of  
30 the sensor arrangement, i.e. its functional relationship between application force and output signal, can only be modified within narrow limits and then by way of radical construction changes of the sensor arrangement.

Further examples of pressure-sensitive electro-  
35 nic pens are given in US-A-6,104,388, US-A-5,895,895, US-A-5,571,997 and US-A-5,548,092.

Summary of the Invention

Thus an object of the present invention is to provide an electronic pen with a force sensor arrangement which is easy to mount and maintain.

5 It is also an object to provide such a pen whose force sensor arrangement is both reliable and durable.

A further object is to provide an electronic pen with a force sensor arrangement whose characteristics can be customised without radical changes of the construction of the arrangement.

10 These and other objects that will be evident from the following description are achieved wholly or partly by an electronic pen according to claim 1. Preferred embodiments are defined in the dependent claims.

15 According to the invention, both installation of the sensor arrangement in the pen and maintenance and service thereof are facilitated owing to the sensor arrangement being designed as a modular unit. The use of such a modular unit, in contrast to the approach of combining loose parts in the pen into a sensor arrangement, also allows good control over the tolerances of the cooperating parts. Furthermore, easy assembly of the sensor arrangement is made possible since the force-receiving element is designed with built-in spring action that returns it to the initial position.

25 The invention also enables modification of the characteristics of the sensor arrangement, without requiring radical construction changes, by modification of the material properties of the closure element, such as composition, thickness etc.

30 According to an embodiment, the force-receiving element is cantilevered in the sensor arrangement. This enables a compact sensor arrangement with small motions of the force-receiving element between the initial position and the activated position. This can, in turn, be converted into a small amount of wear on the parts included. In this embodiment, the force-receiving ele-

ment's spring action can easily be provided about its fixing point in the sensor arrangement.

It is preferred that both the electrode element and the closure element be essentially planar since this further increases the possibility of the providing a compact sensor arrangement.

The sensor arrangement preferably comprises a sheet substrate with a closure area and an electrode area formed thereon, the substrate being bent such that the closure area and the electrode area form said closure element and said electrode element, respectively. Such a sensor arrangement is easy to manufacture and its construction can be made robust.

In one embodiment, the closure element is arranged as the force-receiving element in the sensor arrangement, which may be advantageous since the closure element can be a passive component which, in contrast to the electrode element, need not be connected directly to a voltage source.

The electrode element conveniently comprises two electrically separate conductor paths which form an active surface cooperating with the closure element. In one embodiment, at least a central surface portion of the active surface has an essentially uniform distribution of said conductor paths. This minimises the sensitivity of the sensor arrangement to any variations in the impact point of the application force on the electrode surface. Such variations may arise, for instance, as a result of the necessary tolerances or wear in the guiding of the pen stem in the pen.

According to an embodiment, the sensor arrangement comprises a spacer of electrically insulating material which, in said activated position, is arranged to at least partly encompass the active surface. The spacer thus holds peripheral portions of the force-receiving element at a distance from the other element while at the same time opposite portions of the force-receiving

element are allowed to be urged into electrical contact with the active surface. The spacer can be in the form of protrusions on one or both of the closure and electrode elements. The above embodiment has been found to promote a stable output signal from the sensor arrangement by the spacer stabilising and controlling the contacting process between the closure and electrode elements in the activated position. This also minimises the risk of short circuit of the electrode element in case the closure and/or electrode elements are deformed in operation, as may occur at high operating temperatures.

In an embodiment, the closure element includes a pressure-sensitive material. It is thus possible to more or less customise the characteristics of the sensor arrangement by adaptation of the composition and/or thickness of the pressure-sensitive material.

The electronic pen according to the invention can further comprise a force-transmitting element which is attached to one end of the pen stem and has a rounded abutment surface for cooperation with the force-receiving element. The force-transmitting element aims at, inter alia, providing a consistent abutment surface against the force-receiving element, independently of the appearance of the end of the pen stem. Furthermore, the force-transmitting element can be designed to absorb the major part of the striking power that arises if the pen is dropped so that the pen stem hits the base. The rounded abutment surface gives the advantage that the force-transmitting element's engagement point on the force-receiving element is essentially independent of any inclination of the force-transmitting element. This reduces the requirements for tolerances in the guiding of the force-transmitting element and the pen stem in the pen, as well as the requirements for accuracy in mounting.

It is also preferred for the force-transmitting element to be made of an elastic material. Such a force-transmitting element can be softly engaged with the

force-receiving element, which has been found to give a more even output signal from the sensor arrangement. The elastic material, in combination with a suitable construction of the electrode element, also allows a sensor arrangement whose output signal at least partly is a function of the abutment area between the force-transmitting element and the force-receiving element and, thus, the contact area between the closure and electrode elements.

10       According to an embodiment, the force-transmitting element defines a blind hole which is adapted to receive one end of the pen stem and whose peripheral wall has at least one longitudinal groove. Such a groove can conduct air into the pen stem to equalise a negative pressure  
15       that possibly forms in the pen stem as its marking fluid is being consumed. Such a negative pressure can potentially prevent, or at least interfere with, the dispensing of marking fluid from the pen stem. The groove also facilitates insertion of the end of the pen stem into  
20       the blind hole, which may be advantageous when the force-transmitting element is made of an elastic material which may have a high coefficient of friction.

Handheld electronic apparatus should survive a fall from reasonable heights. A sensitive point of an electronic pen is the pen stem, through which striking power can be conducted into the interior of the pen and there cause great damage. The major part of such striking power can be absorbed by the elastic force-transmitting element. This requires, however, that the end of the pen  
25       stem be prevented from cutting through the force-transmitting element. To this end, the force-transmitting element may comprise an insert of a hard and durable material which is arranged over the end wall of the blind hole.

35       To further promote the above-mentioned ventilation of the interior of the pen stem, the insert may, on its surface facing the blind hole, have at least one depres-



sion that extends from a central portion of the said surface and connects to said longitudinal groove. Such a depression can be provided by ribs and/or grooves of the surface of the insert.

5       The inventive electronic pen may also comprise an elongate holder defining a first and a second chamber, wherein the sensor arrangement is mounted in the first chamber and the force-transmitting element is slidably received in the second chamber for longitudinal movement  
10 into the first chamber against the spring action of the force-receiving element. Such a holder forms a mounting unit which can easily be mounted and dismounted in the pen. The holder can hold the force-transmitting element in place when exchanging the pen stem, and can also contribute to guiding the force-transmitting element towards  
15 the sensor arrangement, which via the holder can be accurately located in the pen.

A further object of the present invention is to suggest a technique of minimising the power consumption during operation of an electronic pen with a pen stem and  
20 an associated force sensor.

This object is achieved by a control device and a method according to claims 25 and 32, respectively.

#### Brief Description of the Drawings

25       The invention will be described below by way of example and with reference to the accompanying drawings which schematically illustrate currently preferred embodiments and in which

30       Fig. 1 is a side view of relevant inner parts of an electronic pen according to the present invention,

Figs 2a and 2b are side views of an inventive sensor arrangement in an initial position and an activated position, respectively,

35       Fig. 3a is a top plan view of a substrate for forming the sensor arrangement in Figs 2a-2b, and Fig. 3b is a side view of the substrate after appropriate forming,

Figs 4a and 4b are opposite top plan views of a holder for the sensor arrangement in Figs 3a-3b, and Fig. 4c is a sectional view of the holder along line A-A in Fig. 4b,

5 Figs 5a and 5b is a longitudinal sectional view and an end view, respectively, of an activator which transmits force from the pen stem of the pen to the sensor arrangement in Figs 2a-2b,

10 Fig. 6 is an exemplary diagram of the characteristics of the sensor arrangement,

Fig. 7 is a diagram of an electric circuit for controlling an electronic pen of the kind shown in Fig. 1, and

15 Fig. 8 is a diagram of an analog measuring signal which after preprocessing is received by an AD converter from a sensor arrangement.

#### Description of Preferred Embodiments

First a general introduction of the different components of the invention is given, with reference to Fig. 1. Then follows a detailed description of the central aspects of the invention, with reference to Figs 2-8. In the drawings, the same reference numerals are used throughout to identify equivalent parts.

#### 1. Electronic Pen

25 The following description starts from a pen which electronically records handwritten information via optical detection of a position-coding pattern on a writing base. A full description of such a pen is given in WO 01/16691, WO 01/26032 and WO 01/26033 which in their entirety are incorporated herein by reference. However, it should be pointed out that the invention is also applicable to other types of electronic pens requiring a force-sensitive sensor.

35 The pen 10 in Fig. 1 comprises an elongate, hollow pen body 12, in which a pen stem 14 is inserted so that its end cooperates with a force sensor 16 which is mounted in a holder 18. The pen 10 also contains a printed

circuit board 20 with electronic components that are necessary for controlling the pen, such as one or more processors 22, memory circuits 24 and communication units 26. Moreover the pen can comprise a battery 28 for feeding voltage to the printed circuit board 20. In an alternative embodiment, the pen is connected to an external power source. At the front end of the pen 10 an optical module 30 is mounted, containing optical components (not shown) and an image sensor 32 which is electrically connected to the printed circuit board 20.

The pen stem 14, which can be a writing means or a passive pointer, is exchangeable by being extracted from the pen body 12. The inner end of the pen stem 14 therefore is frictionally engaged in an activator 34 which is slidably mounted in the holder 18. The activator 34 is arranged opposite to the force sensor 16 to transmit forces from the pen stem 14 to the force sensor.

Fig. 2 illustrates the force sensor 16, the holder 18 and the activator 34 in more detail, on the one hand in an unloaded state (Fig. 2a) and, on the other hand, in a loaded, activated state (Fig. 2b). The activator 34 is slidably moved between these positions, typically a distance of about 1-2 mm. The force sensor 16, the holder 18 and the activator 34 will be described in more detail with reference to Figs 3-5.

Reference once more being made to Fig. 1, the pen 10 can take three different operation modes: a fully switched-off state, a waiting state and an active state. The pen 10 is switched on and off by means of a switch (not shown), which can be implemented as an on/off button on the pen, or as a sensor for sensing when a protective cap (not shown) is removed from the pen or when the pen stem 14 is pressed out of the pen body 12.

Once the pen 10 is switched on but unloaded, for instance when the user has put it down or between pen strokes, it is put in the waiting state, in which essen-

tially all electronics is switched off to minimise the power consumption.

As soon as the axial load on the pen stem 14, given by the force sensor 16, exceeds a predetermined threshold, the pen changes from the waiting state to the active state, in which the electronics is activated and the optical module 30 is made to take images at a given sampling frequency. Each image is recorded from the image sensor 32 by a processing unit, such as the processor 22, which based on the reproduced position-coding pattern calculates the position of the pen stem 14 on the base. The processing unit 22 also reads the application force of the pen stem 14 for each image and generates associated pairs of positions and forces which can be transmitted to an external unit (not shown) via the communication unit 26 or stored locally in the memory 24. Based on these pairs of data, each electronically recorded pen stroke can be reproduced, in real time or on a subsequent occasion, with a stroke width which in a natural manner varies with the application force.

An electronic pen 10 of the above type should satisfy the following specifications. Each pen should have a given functional relationship, stable over time, between application force and measuring signal. The pen's measurement of force should be effected with high resolution within a relevant force range, typically from about 0.1 N to about 5 N. The pen should be able to withstand variations in environmental conditions, such as moisture and temperature. It is also desirable that the performance of the pen remain essentially the same also after a very large number of strokes, for instance 10 million strokes, and also after a large number of exchanges of pen stem, typically 300. The pen should also survive a fall from about 1 m with the pen stem against a base. Further the pen should leave the waiting state as soon as possible, which means that the force sensor should typically have a response time in the order of 1 ms. The power consumption

should be minimal, at least if the pen is to be operated by a battery.

These specifications are satisfied by the pen that will be described in detail below with reference to

5 Figs 2-8.

## 2. Force Sensor

To start with the force sensor 16 which is shown in Fig. 3, it is constructed from a sheet substrate 36 of electrically insulating material, typically a foil of plastic material, such as ethylene polyterephthalate (PET).

On the substrate 36, there is applied a layer of an electrode material forming an electrode 41 provided with two electrically separate conductor patterns 38, 40. The conductor patterns 38, 40 cooperate in an active area 42 via conductor projections 44 which extend between each other in an essentially uniformly distributed manner. By uniformly distributed manner is meant in this context that the total conductor surface area, within an impact area of a given size, is the same for both conductors 38, 40 independently of the impact point in the active area 42.

In a functioning embodiment, use is made of an electrode material which is a graphite layer with a thickness of about 0.01 mm which is applied to a PET substrate with a thickness of about 0.1 mm, the conductor projections being about 1 mm wide and having a mutual distance of about 1 mm. Of course, materials as well as dimensions can be selected entirely according to the desired performance. Other electrode materials comprise metals, such as silver and copper. An advantage of graphite is its formability and good adherence, which allows bending of the substrate (cf. Fig. 3b).

A thin layer (typically about 0.01 mm thick) of a closure material is also applied to the substrate 36. This closure material, which defines a closure 46, is such that, when pressed against the active surface 42,

it conducts a current between the conductors 38, 40 when connected to a power source. The closure material is also suitably pressure-sensitive so that its electric resistance decreases with an increasing press force.

5 US-A-4,489,302, which relates to force sensors in keys of electronic musical instruments and which in its entirety is incorporated herein by reference, discloses pressure-sensitive materials which are formed by mixing  
10 semiconductive particles with a resin material, for instance particles of molybdenum disulphide in acrylic plastic, the electric resistance of the material being given by the amount of particles.

US-A-5,296,837, which in its entirety is incorporated herein by reference, discloses further pressure-  
15 sensitive, semiconductive materials which are formed by mixing particles of tin oxide with a conductive resin material, which in turn may consist of a mixture of carbon particles and a non-conductive resin material.

Thus there are a variety of potentially suitable  
20 closure materials, and a person skilled in the art can easily browse through them to obtain the desired performance.

The force sensor 16, which is shown in Fig. 3b, is made by forming the substrate 36 in Fig. 3a, more specifically by bending along the dashed lines L1, L2. This  
25 results in a force sensor 16 with a resilient closure 46 which is cantilevered to cooperate with the active surface 42 of the electrode 41. The spring force of the closure 46 is sufficient to return the pen stem 14 and  
30 the activator 34 from the activated position (Fig. 2b) to the initial position (Fig. 2a) when the pen is raised from the base. For a pen stem of about 1 g, the returning force of the closure should be at least about 15 mN, suitably about 30-100 mN, to minimise the risk that the  
35 pen is inadvertently activated when being shaken. With the above dimensions of the substrate, this can be achieved with an angle between the closure and the elec-

trode of about 10-30 degrees. The web portion 48 between the electrode 41 and the closure 46 is waist-shaped to reduce the stress in the substrate material.

As is evident from Fig. 3b, the electrode 41 of the force sensor 16 is bent essentially at right angles to form a connecting portion 49 in which the conductors 38, 40 extend to a contacting hole 50. In the pen, the printed circuit board 20 (Fig. 1) is mounted against the connecting portion 49 so that the conductors 38, 40 at the periphery of the hole 50 are contacted with contact means (not shown) on the printed circuit board 20.

To stabilise the output signal of the force sensor, a spacer 52 of electrically insulating material, such as a dielectric material, typically with a thickness of about 0.02 mm, is applied round the active surface 42. In an alternative embodiment (not shown) the spacer completely encompasses the active surface.

### 3. Holder

Figs 4a-4c show the holder 18 in more detail. The holder defines two chambers 54, 56 for receiving the force sensor 16 and the activator 34, respectively.

The sensor chamber 54 is axially defined by, on the one hand, an abutment wall 58 for the active surface 42 of the electrode 41 and, on the other hand, radially inwards extending locking lugs 60 for supporting the electrode 41 during mounting of the activator 34 in the activator chamber 56. The sensor chamber 54 further has a guide hole 62 which connects to the abutment wall 58 and is adapted to fix the position of the bent web portion 48 of the sensor 16 (Figs 2-3).

The sensor chamber 54 opens into the activator chamber 56 which is formed to receive the activator 34 with a certain play. The activator chamber 56 is defined by flexible side wall portions 64 with longitudinal hooks 66 defining a mounting opening 68 whose width is less than the width of the activator 34. When installing the activator 34 in the holder 18, the activator 34 is urged

past the side wall portions 64 which then spring back and hold, with the hooks 66, the activator 34 in place in the chamber 56.

As is evident from Fig. 4c, the activator chamber 56  
5 opens into a through duct 70 for receiving the pen stem 14 (Fig. 1).

The holder 18 further has flanges 72, 74 with through holes for fixing to the body 12 of the pen (Fig. 1), one flange 74 also serving as carrying surface for the connecting portion 49 of the electrode 41.  
10 The flange 74 also has a socket 76 with radial stubs 78 for securing the force sensor 16 to the flange 74 before the holder 18 is mounted in the pen. In a finally assembled pen (Fig. 1) the connecting portion 49 is held  
15 in place by means of the printed circuit board 20 which abuts against the flange 74.

As shown in Fig. 4a, the holder 18 has on its outside a guide groove 80 for cooperation with an upright guide plate (not shown) on the body 12 of the pen. This  
20 arrangement aims at preventing the holder 18 from being mounted in a slightly inclined manner relative to the pen stem 14 (Fig. 1), which could cause increased friction and wear between the activator 34 and the holder 18. The holder 18 is in fact mounted by the fixing hole of the  
25 flange 72 first being fixed to the body, for instance by the fixing hole being mounted on a fixing pin on the body which is then formed by thermal upsetting. Subsequently the printed circuit board 20 is placed on the holder 18, and a screw is inserted through a hole (not shown) in the  
30 printed circuit board 20, through the fixing hole of the flange 74 and into the body. However, the fixing hole should be oversized to minimise tension and any removal of material during insertion of the screw, since this would potentially interfere with contacting. By cooperation  
35 between the guide groove 80 and the guide plate, correct alignment of the holder 18 is guaranteed during



insertion of the screw through the oversized fixing hole of the flange 74.

It should be pointed out that alternatively the holder 18 can be moulded as part of the body 12 (Fig. 1).

5 Furthermore the holder 18 can be designed to be mounted with the mounting opening 68 directed inwards to the body 12, i.e. away from the printed circuit board 20 (Fig. 1). This minimises the risk of electrostatic discharge between the printed circuit board 20 and any  
10 uncovered part of the pen stem 14 if this is made of metal.

#### 4. Activator

The activator 34, which is shown in more detail in Figs 5a-5b, is made of a yielding material to ensure,  
15 inter alia, soft engagement with the closure 46 and the electrode 41 and to take up any striking power from the pen stem.

The activator 34 has a rounded end 82 for engagement with the closure 46. Thus, the point of engagement of  
20 the activator 34 on the active surface 42 is stabilised, which results in a corresponding stabilisation of the output signal of the sensor.

At the other end of the activator 34, a blind hole 84 is formed to receive the rear end of the pen stem. A  
25 widened inlet facilitates the insertion of the stem end. In the base of the blind hole 84, a shock-absorbing insert 86 is arranged. Fall tests, where the pen is dropped from a height of one meter on a base, indicate that the pen when hitting the base is decelerated by at least  
30 about 200 G. A pen weighing about 40-50 g is thus subjected to loads in the order of 100 N. The end of the pen stem typically has a surface size of about 1-3 mm<sup>2</sup>, and therefore the insert should be made of a hard and durable material which suitably is capable of withstanding  
35 pressures of up to at least about 30-100 N/mm<sup>2</sup>.

As is evident from the end view in Fig. 5b, a plurality of longitudinal grooves 88 are distributed over the

peripheral wall of the blind hole 84, on the one hand to facilitate the insertion of the stem end into the blind hole 84 and, on the other hand, to equalise any negative pressure in the pen stem 14. For the latter purpose, the  
5 insert 86 has radial ducts 98 extending from the centre of the insert 86 to its periphery.

In an exemplary embodiment, the activator is made of TPE (thermoplastic elastomer; hardness Shore 87A) having a width of 4 mm, a radius of curvature of the end of  
10 10 mm and with an insert of fibre-reinforced ABS plastic which with a thickness of about 1 mm is moulded in situ in the blind hole.

Fig. 6 gives an example of a functional relationship between application force on the pen stem and electric  
15 resistance over a force sensor in an electronic pen of the type described above. It should be emphasised that variations in resistance in case of low loads are stressed by the diagram being given on a log-log scale.

#### 5. Electronic Control

20 Fig. 7 shows a circuit for controlling an electronic pen. The circuit is electrically connected to the force sensor 16 as described above, which is connected to a constant current source 100 which in this example supplies about 15 mA.

25 The circuit further comprises a control unit 102 which can be implemented by a commercially available microcontroller or microprocessor (CPU), by a digital signal processor (DSP), or by another programmable logic device, such as an FPGA, or alternatively as a  
30 hardware circuit (ASIC), as discrete analog and digital components, or as a combination of the above.

The circuit further comprises a bank of resistors 104 which each via separate lines are connected to the control unit 102.

35 An AD converter 106 (ADC) is connected to receive an analog measuring signal corresponding to the voltage across the force sensor 16 and to emit a digital measur-

ing signal which is received by the control unit 102. The AD converter 106 further has a control input which is connected to receive a control signal from the control unit 102.

5       A comparator 108 included in the circuit has two inputs, one connected to the resistor bank 104 for receiving a reference signal, and the other connected to receive the analog measuring signal from the force sensor 16. An output of the comparator 108 is connected to an  
10 interrupt input of the control unit 102. The comparator 108 is in the shown embodiment an integrated operation amplifier but can alternatively, for instance, be implemented as discrete components.

During manufacture of the pen, a final calibration  
15 step is carried out, in which the pen stem is subjected to a vertical load of 0.2 N and the control unit 102 is made to emit such a combination of voltage signals across the resistor bank 104 that the reference signal equals the measuring signal from the force sensor 16, which is  
20 detected by the control unit 102 by changes in the signal on the interrupt input. This requires, however, that the voltage across the force sensor 16 will be within a permissible range, in the example corresponding to a resistance of the force sensor 16 in the range 50-150 kOhm.  
25 The control unit 102 is then programmed to emit the combination of voltage signals each time it leaves its switched-off state.

Thus, as long as the pen is not switched off, the control unit 102 feeds the reference signal to the reference input of the comparator 108.  
30

When the pen is switched on and automatically changes to its waiting state, the AD converter 106 remains switched off since the control unit 102 does not emit an activating signal to the control input of  
35 the converter 106. As long as the force sensor 16 is subjected to a load of less than 0.2 N, the voltage on the measuring signal input of the comparator 108 will

exceed the reference voltage and the output signal of the comparator 108 will assume a value (high/low) which does not cause the control unit 102 to change its state. It will be appreciated that the power consumption is minimal since essentially no electric current flows through the circuit and the control unit 102 can be switched off, or only operate at a low clock frequency, typically 100-500 Hz, for instance to intermittently check that the battery charge is sufficient, that the optical module is ready to record images, that relevant memory registers are ready to receive images etc.

When the load exerted on the force sensor 16 exceeds the reference force (0.2 N), its resistance decreases (cf. Fig. 6) and, thus, also the voltage across the force sensor 16. The comparator 108 then emits an interrupt value, IRQ, (low/high) on its output, which immediately causes the control unit 102 to increase the clock frequency, typically to about 100 MHz. In this active state, the control unit 102 effects triggering of the optical module 30 (Fig. 1) to record images at a fixed sampling frequency, typically about 100 Hz, and synchronous triggering of the AD converter 106 on the control input to generate a digital 8-bit force value corresponding to the application force. The control unit 102 also triggers synchronous reading of a digital image from the image sensor 32 of the optical module 30. After decoding the image, which can be controlled by the control unit 102 or a separate processing unit, a logical connection between the decoded position and the generated force value takes place.

As soon as the load exerted on the force sensor 16 falls below the reference force, the interrupt signal on the output of the comparator 108 disappears and the control unit 102 returns to its waiting state.

According to an alternative embodiment (not shown), the circuit has no separate AD converter (106 in Fig. 7). Instead the control unit 102 is designed to generate the

reference signal in the waiting state via the resistor bank 104, and to change to the active state as soon as the output signal from the comparator 108 changes states. In the active state, the control unit 102 is designed to control the voltage distribution over the resistor bank 104 for digital conversion of the analog measuring voltage on the measuring signal input of the comparator 108, the output signal from the comparator 108 being used as feedback signal in this conversion. The control unit 102 then returns to the waiting state as soon as the digital force value is found to be below a digital reference value, which is determined and stored in the control unit 102 in the above calibration step.

The alternative embodiment enables saving of components and, thus, a reduction of both cost and space requirement. In a currently particularly preferred embodiment, the control unit, the comparator and the resistor bank are implemented as a programmable AD converter.

In the two embodiments above, an AD conversion of the analog measuring signal of the force sensor is supplemented with a power-saving comparison of the same with a reference signal. Thus, instead of continuously AD converting the measuring signal at a fixed high frequency and, from this, controlling the states of the pen, the pen is switched between a low power state with simple level detection of the measuring signal and a high power state with AD conversion of the measuring signal and simultaneous position detection.

In both embodiments, the analog measuring signal of the force sensor is digitised, within a voltage range  $V_{\min}$ - $V_{\max}$ , over a given number of equidistant levels or states, for instance 256 (8 bits). Since there is a strongly non-linear (logarithmic) relationship between the measuring signal (voltage/resistance) and the applied force (cf. Fig. 6), the resolution in force will vary over the voltage range. If a certain minimum resolution, for instance 50 mN (5 g load), is to be achieved over the

entire voltage range, an AD converter with a large number of levels (bits) is required. Such an AD converter can be undesirably expensive and/or energy requiring.

This problem can be overcome by the control circuit  
5 being allowed to operate with at least two different AD conversion ranges, which is achieved by controlling the AD converter and/or the constant current source.

In the first-mentioned embodiment, the voltage range  $V_{\min}$ - $V_{\max}$  of the AD converter is conveniently controlled so  
10 that a desired resolution is achieved, preferably by controlling the reference voltage or reference voltages defining the voltage range. Controlling can be effected by an external or an internal control unit which thus shifts the AD converter between different measuring  
15 ranges when the analog measuring signal reaches given switch points.

In the second embodiment, the size of the measuring signal is instead controlled in relation to the voltage range  $V_{\min}$ - $V_{\max}$  of the AD converter by the constant current  
20 source being caused by a control unit to draw a predetermined current through the force sensor. The predetermined current is fixed to give, within a predetermined force range, measuring signals which with the desired resolution are mapped against the voltage range  $V_{\min}$ - $V_{\max}$  of the  
25 AD converter. It will be appreciated that the above problems are thus overcome without noise being amplified relative to the measuring signal. The thus controlled analog measuring signal is illustrated in Fig. 8 where the conversion range is limited by a high and a low  
30 switch point  $V_{\text{high}}$  and  $V_{\text{low}}$  respectively. These switch points can, but do not have to, coincide with the voltage levels that define the measuring range  $V_{\min}$ - $V_{\max}$ . Each time the analog measuring signal reaches the low or the high switch point  $V_{\text{low}}$ ,  $V_{\text{high}}$ , the constant current source is  
35 directed to a new current level which raises or lowers the measuring signal within the voltage range. Each such new current level defines a conversion range, indicated

1, 2 and 3 respectively in Fig. 8. The shift between the conversion ranges takes place with an offset  $\Delta$  so that the measuring signal is directed from  $V_{low}$  to  $V_{high}-\Delta$ , or respectively from  $V_{high}$  to  $V_{low}+\Delta$ . In the shift between the conversion ranges, a hysteresis is thus introduced, which  
5 aims at preventing small signal variations, such as measuring signal noise, round the switch points  $V_{low}$ ,  $V_{high}$  from generating quick shifts back and forth between the conversion ranges.

10 It should be pointed out that, to each conversion range, different switch points can be assigned to which, in turn, different offsets can be assigned.

It should also be pointed out that the above hysteresis can also be introduced in the first embodiment  
15 involving controlling of the voltage range of the AD converter.

The resulting, digitised measuring signal is then issued with an indication of the associated conversion range. The receiver of the digitised measuring signal  
20 conveniently has access to the conversion data that indicates the size of each conversion range, and also calibration data corresponding to a parametrisation of the relationship between resistance and force of the force sensor. The relationship can be specific for a given  
25 force sensor, or an average relationship.

It should be pointed out that all of the circuit solutions that have been described above are generally applicable to electronic pens and can cooperate with any form of force sensor that can be caused to emit an analog  
30 measuring signal corresponding to the force applied to the pen stem of the pen. Such force sensors can be based on, for instance, magnetic detectors, as described in US-A-5,565,632 or US-A-5,895,895, or strain gauges, as described in US-A-5,548,092.

## 35 6. Alternative Embodiments

The invention has been described above in the form of exemplary embodiments. However, the invention is in no

way limited thereto and includes many other variants, as defined by the scope of protection of the appended claims and as will also be easily appreciated by a person skilled in the art.

5       According to an alternative, a pressure-sensitive layer can be applied to the active surface of the electrode. The closure can in such an embodiment be provided with a conductive or semiconductive material, possibly with pressure-sensitive properties.

10       In another alternative embodiment, the closure is made of a semiconductive material which in itself is not pressure sensitive. In such an embodiment, the sensor's sensitivity to force is achieved by the activator's abutment surface against the closure and, thus, the electro-  
15       nic contact area between the closure and the electrode being changed with the force of application.

      According to still another alternative, the electrode element is provided with a plurality of conductor points distributed over the active surface, while the  
20       closure is provided with a planar electrode. If a voltage is applied between the electrode and the closure, a variation in electric current is obtained according to the contact area between the closure and the electrode.

      Instead of the cantilevered construction as shown  
25       in the drawings, the sensor can be made up of a flexible, force-receiving closure which is arranged at a distance from and is fixedly connected to an electrode via a spacer of electrically insulating material. The spacer encompasses an active surface of the electrode and carries the closure so that the closure can be deformed to  
30       abut against the active surface. A similar sensor construction is known from the above US-A-4,489,302 in connection with keys of electronic musical instruments.



## CLAIMS

1. An electronic pen comprising a body (12), a pen  
5 stem (14) slidably received in said body (12), and a  
sensor arrangement (16) whose electrical resistance  
varies in accordance with the amount of force applied  
to the sensor arrangement (16) via the pen stem (14),  
characterised in that the sensor arrangement  
10 (16) is designed as a modular unit with an electrode ele-  
ment (41) and a closure element (46) that are mutually  
arranged in an essentially electrically insulated initial  
position, that one of said elements (41; 46) is arranged  
to receive said force from the pen stem (14) and thereby  
15 be urged to an activated position in electrical contact  
with the other element (46; 41), and that, on relaxation  
of said force, the force-receiving element (41; 46) is  
arranged to automatically spring from the activated posi-  
tion back to the initial position.

20 2. The electronic pen as set forth in claim 1,  
wherein the electrode element (41) is integrated with  
the closure element (46).

3. The electronic pen as set forth in claim 1 or 2,  
wherein the force-receiving element (41; 46) is canti-  
25 levered in said sensor arrangement (16).

4. The electronic pen as set forth in claim 1, 2 or  
3, wherein said electrode element (41) and said closure  
element (46) are essentially planar.

5. The electronic pen as set forth in any one of  
30 the preceding claims, wherein the sensor arrangement (16)  
comprises a sheet substrate (36) with a closure area and  
an electrode area formed thereon, the substrate (36)  
being bent such that the closure area and the electrode  
area form said closure element (46) and said electrode  
35 element (41), respectively.

6. The electronic pen as set forth in any one of the preceding claims, wherein the closure element (46) is the force-receiving element.

5 7. The electronic pen as set forth in any one of the preceding claims, wherein the electrode element (41) comprises two electrically separate conductor paths (38, 40) forming an active surface (42) for cooperation with the closure element (46).

10 8. The electronic pen as set forth in claim 7, wherein at least a central surface portion of the active surface (42) has an essentially uniform distribution of said conductor paths (38, 40).

15 9. The electronic pen as set forth in claim 7 or 8, wherein the sensor arrangement comprises a spacer (52) of electrically insulating material which, in said activated position, is arranged to at least partly encompass the active surface (42).

20 10. The electronic pen as set forth in any one of the preceding claims, wherein the closure element (46) includes a semiconducting material.

11. The electronic pen as set forth in any one of the preceding claims, wherein the closure element (46) includes a pressure-sensitive material.

25 12. The electronic pen as set forth in any one of the preceding claims, further comprising a force-transmitting element (34) which is attached to one end of the pen stem (14) and has a rounded abutment surface (82) for cooperation with the force-receiving element (41; 46).

30 13. The electronic pen as set forth in claim 12, wherein the force-transmitting element (34) is made of an elastic material.

35 14. The electronic pen as set forth in claim 12 or 13, wherein the force-transmitting element (34) defines a blind hole (84) which is adapted to receive said one end of the pen stem (14) and whose peripheral wall has at least one longitudinal groove (88).

15. The electronic pen as set forth in claim 14, wherein the force-transmitting element (34) comprises an insert (86) which is arranged over the end wall of the blind hole (84) and is made of a hard and durable material.

16. The electronic pen as set forth in claim 15, wherein the insert (86) on its surface facing the blind hole (84) is provided with at least one depression (90) that extends from a central portion of said surface and connects to said longitudinal groove (88).

17. The electronic pen as set forth in any one of claims 12-16, further comprising an elongate holder (18) defining a first and a second chamber (54, 56), wherein the sensor arrangement (16) is mounted in the first chamber (54) and the force-transmitting element (34) is slidably received in the second chamber (56) for longitudinal movement into the first chamber (54) against the spring action of the force-receiving element (41; 46).

18. The electronic pen as set forth in claim 17, wherein the holder (18) comprises a lug portion (60) which is formed between the first and second chambers (54, 56) to limit the movement of the force-receiving element (41; 46) away from the other element (46; 41).

19. The electronic pen as set forth in claim 17 or 18, wherein the holder (18) defines a mounting opening (68) which at least partly is defined by flexing sidewall portions (64) that allow insertion of the force-transmitting element (34) into the second chamber (56) and limit its lateral movement therein.

20. The electronic pen as set forth in any one of claims 17-19, wherein the holder (18) comprises a guiding element (80) for cooperation with a complementary guiding element on the body (12).

21. The electronic pen as set forth in any one of claims 17-20, wherein the electrode and closure elements (41, 46) are interconnected by means of a web portion (48), and wherein the web portion (48) is received in a

guiding opening (62) defined in a sidewall portion of the first chamber (54).

22. The electronic pen as set forth in any one of claims 17-21, wherein a contacting opening is defined in a sidewall portion of the first chamber (54), and wherein the electrode element (41) extends from the first chamber (54), through the contacting opening, into abutment against a contacting surface which is formed on the holder (18) for contacting a circuit board (20) arranged in the pen.

23. The electronic pen as set forth in claims 21 and 22, wherein the contacting opening is arranged opposite to the guiding opening (62).

24. The electronic pen as set forth in any one of the preceding claims, wherein the electrode element (41) comprises a layer of graphite.

25. A control device for installation in an electronic pen (10) provided with a pen stem (14) and an associated force sensor (16), comprising a comparator (108) which is adapted to receive an analog measuring signal from the force sensor (16), to compare the analog measuring signal with a fixed reference signal and, based on the comparison, to issue a digital output signal; a converter (106) which is adapted to receive the analog measuring signal and to convert this into a sequence of digital force values; and a processor (102) which is electrically connected to the comparator (108) and the converter (106) and which is adapted to selectively activate the converter (106), based on the digital output signal from the comparator (108).

26. The control device as set forth in claim 25, wherein the processor (102), before activating the converter (106), is adapted to switch from a waiting state with low internal clock frequency to an active state with high internal clock frequency.

27. The control device as set forth in claim 26, wherein the processor (102), in its active state, is

adapted to at least intermittently activate a position sensor (30) for determination of the position of the pen (10) on a base.

28. The control device as set forth in claim 27,  
5 wherein the processor (102) is adapted to associate each position with a force value included in said sequence.

29. The control device as set forth in any one of claims 26-28, wherein said processor (102), at least in its waiting state, is adapted to generate said reference  
10 signal.

30. The control device as set forth in any one of claims 26-29, wherein the processor (102) is adapted to receive the digital output signal of the comparator (108) on an interrupt port, at least during the waiting state.

15 31. The control device as set forth in any one of claims 25-30, wherein the comparator (108) and the converter (106) are realised as a first and a second operation mode, respectively, of a programmable analog-to-digital converter.

20 32. A method of controlling an electronic pen (10) based on an analog measuring signal from a force sensor (16) associated with a pen stem (14) of the pen (10), comprising the steps of comparing the analog measuring signal with a fixed reference signal, and selectively,  
25 based on the comparison, initiating an analog-to-digital converter to convert the analog measuring signal to a sequence of digital force values.

33. The method as set forth in claim 32, wherein the force sensor (16) has non-linear force characteristics  
30 over an extensive force range, comprising the step of controlling, based on the size of the analog measuring signal, the conversion to one of at least two given conversion ranges which each correspond to a subrange of said force range.

35 34. The method as set forth in claim 33, wherein the step of controlling the conversion comprises automatically shifting the analog-to-digital converter between at

least two given voltage ranges which each correspond to a subrange of said force range when the analog measuring signal reaches given switch points.

35. The method as set forth in claim 33, wherein the measuring signal is generated as a potential difference over the force sensor (16) which is driven by a constant current generator (100), and wherein the step of controlling the conversion comprises automatically switching, once the analog measuring signal reaches given switch points, the constant current generator (100) between at least two currents, which each result in analog measuring signals, that correspond to a given subrange of said force range, falling within the voltage range of the analog-to-digital converter.

36. The method as set forth in claim 35, wherein said at least two given currents are selected so that the analog measuring signal in each switch point after switching of the constant current generator (100) is different from any other switch point.

1/5

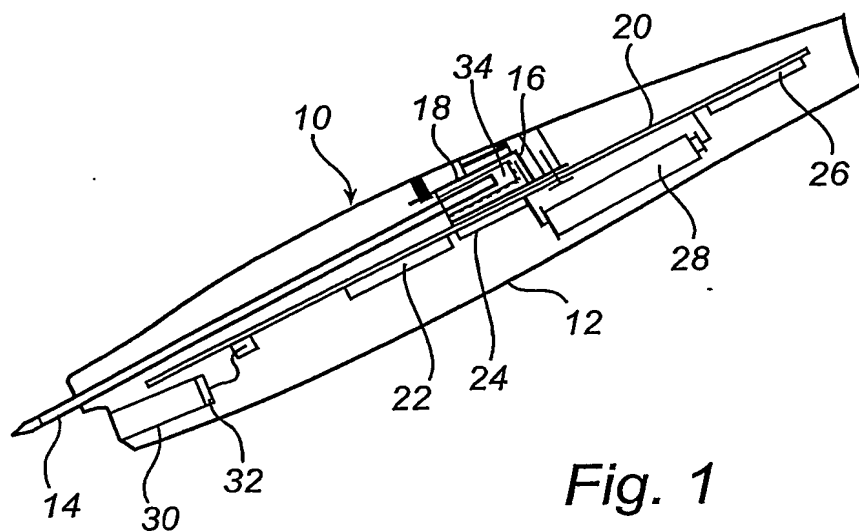


Fig. 1

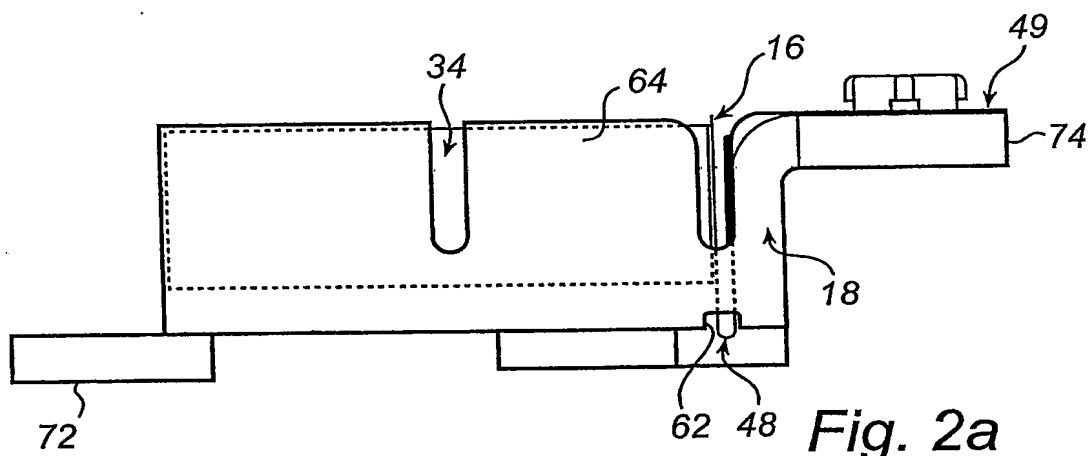


Fig. 2a

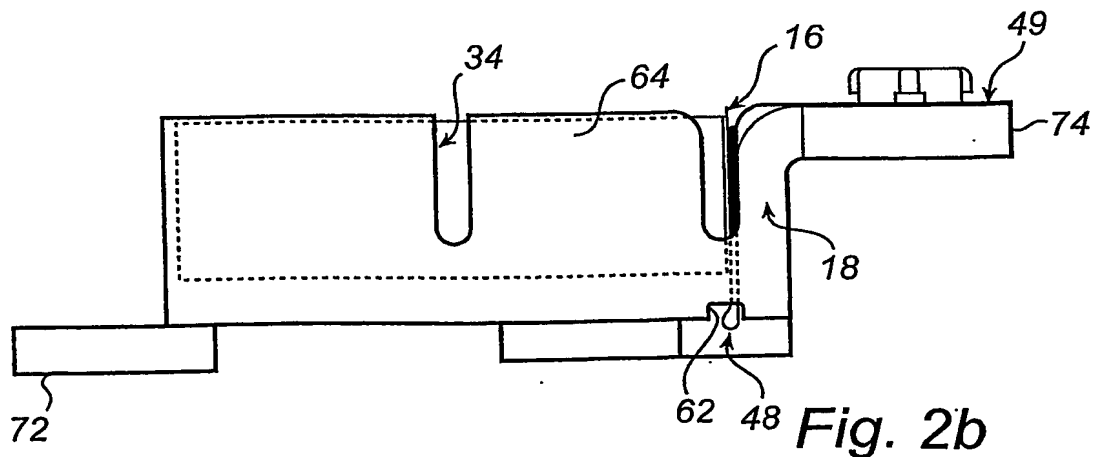


Fig. 2b

2/5

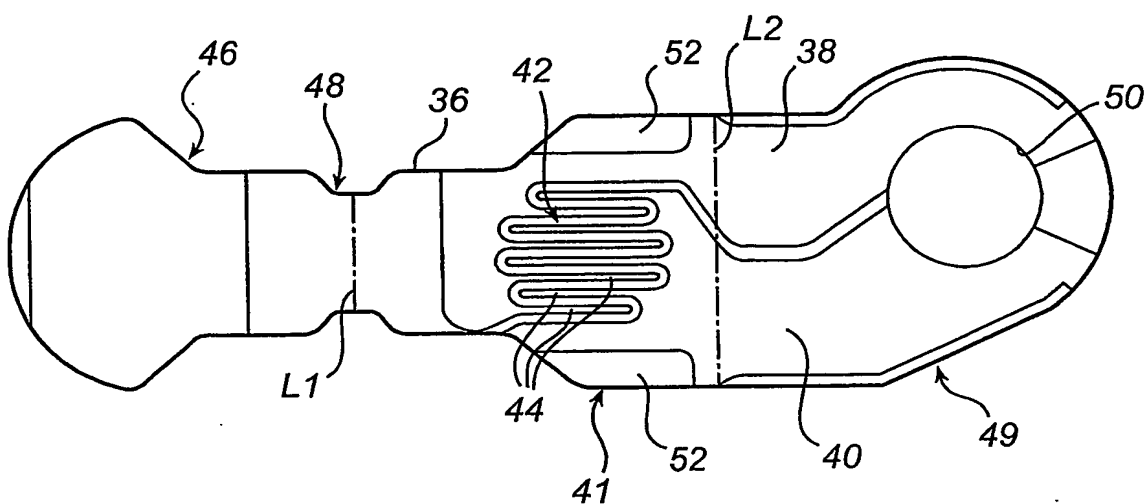


Fig. 3a

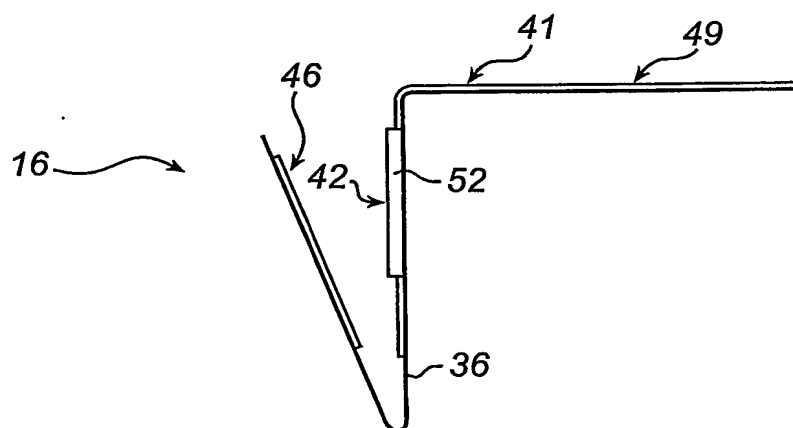


Fig. 3b



3/5

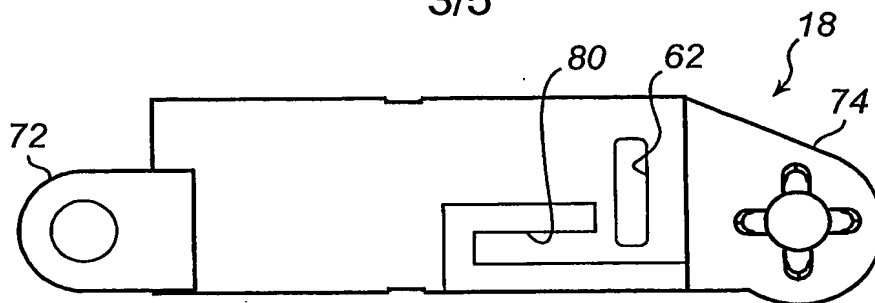


Fig. 4a

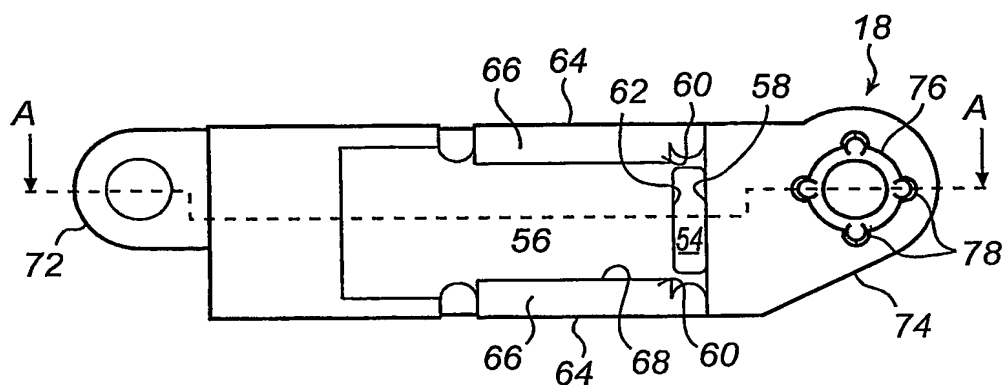


Fig. 4b

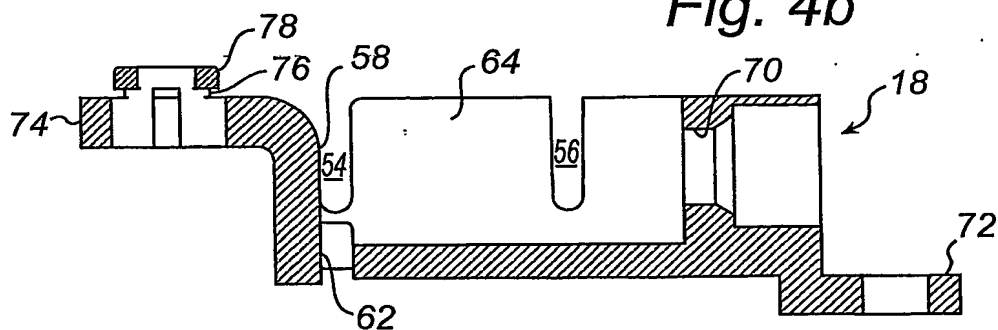


Fig. 4c

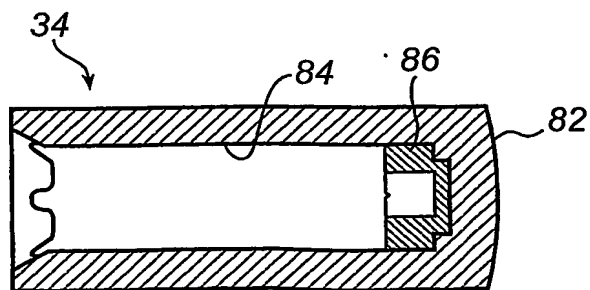


Fig. 5a




Fig. 5b

4/5

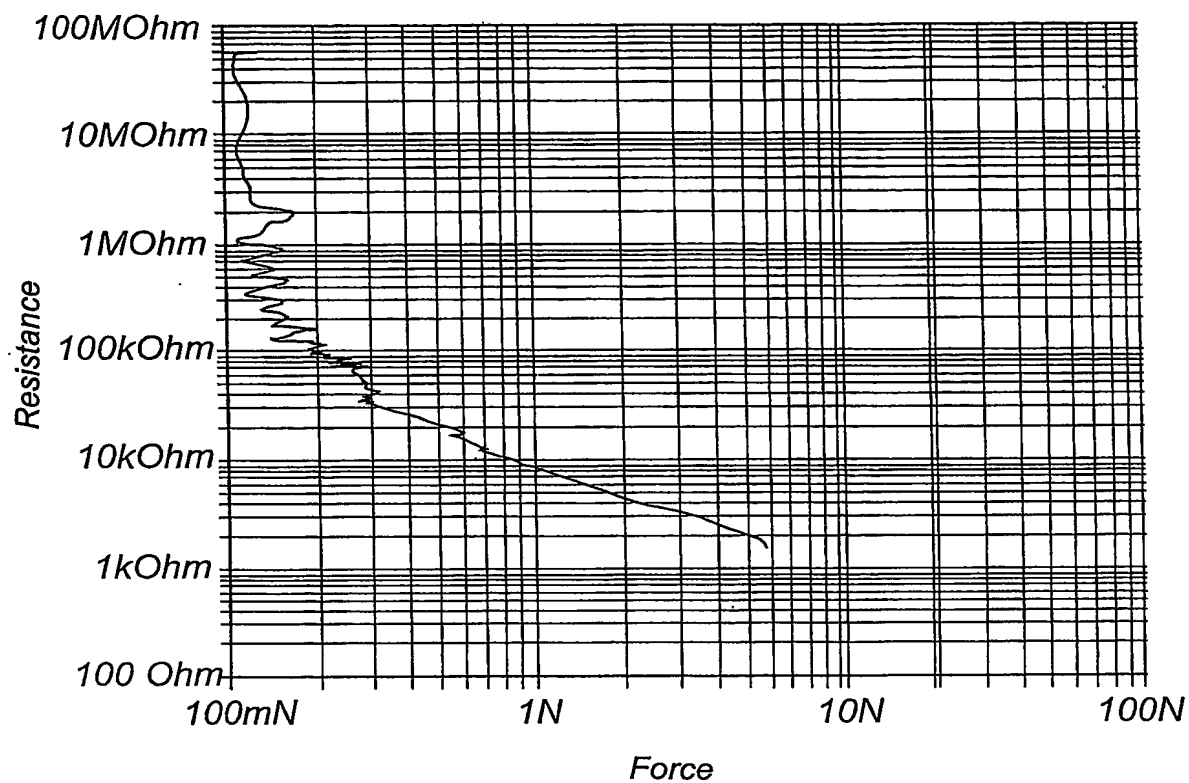


Fig. 6

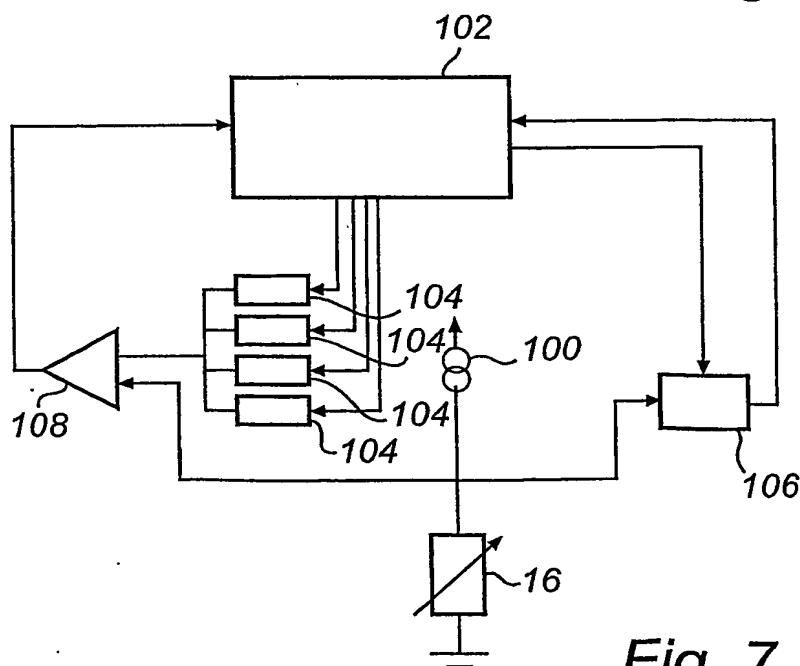


Fig. 7

5/5

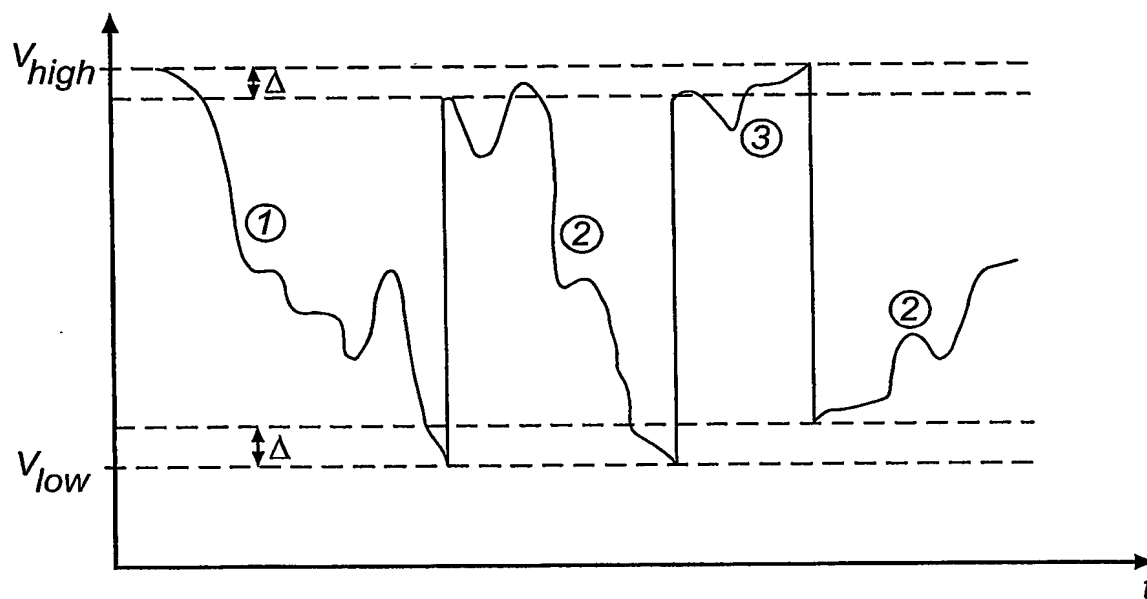


Fig. 8

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00241

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G06K 11/18, G06F 3/033

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6104388 A (KATSU HARU NAGAI ET AL), 15 August 2000 (15.08.00), column 2, line 14 - column 3, line 53, figures 1-8, abstract --	1-36
X	WO 0162520 A1 (PDP PERSONAL DIGITAL PEN), 30 August 2001 (30.08.01), figures 1-2, abstract --	1,32
Y	WO 0161636 A2 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 23 August 2001 (23.08.01), page 4, line 10 - page 5, line 12, figure 1 --	1-36

☒ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

22 April 2003

Date of mailing of the international search report

16-05-2003

 Name and mailing address of the ISA/  
 Swedish Patent Office  
 Box 5055, S-102 42 STOCKHOLM  
 Facsimile No. +46 8 666 02 86

Authorized officer

 Behroz Morandi/mj  
 Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00241

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 0161625 A2 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 23 August 2001 (23.08.01), page 2, line 23 - page 29, line 18, abstract --	2-3,5,17,25,33,35
Y	US 6188392 B1 (MICHAEL O'CONNOR ET AL), 13 February 2001 (13.02.01), column 2, line 65 - column 3, line 13, abstract --	2-3,5,17,25,33,35
A	WO 0161451 A2 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 23 August 2001 (23.08.01), page 4, line 15 - page 2, line 31 --	1-36
A	US 6417845 B1 (JUNG-YU CHEN ET AL), 9 July 2002 (09.07.02), column 1, line 42 - column 3, line 11, abstract ----- --	1-36

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00241

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	6104388	A	15/08/00	JP	11039087 A	12/02/99
WO	0162520	A1	30/08/01	AU	3194901 A	03/09/01
				AU	7009400 A	19/02/01
				FR	2805211 A,B	24/08/01
WO	0161636	A2	23/08/01	AU	3025501 A	27/08/01
				AU	3171601 A	27/08/01
				AU	3171701 A	27/08/01
				AU	3171801 A	27/08/01
				AU	3374901 A	27/08/01
				AU	3545901 A	27/08/01
				AU	3925401 A	27/08/01
				AU	3925501 A	27/08/01
				AU	4060601 A	27/08/01
				AU	4060701 A	27/08/01
				AU	4060801 A	27/08/01
				AU	5031001 A	27/08/01
				AU	5463301 A	27/08/01
				EP	1256044 A	13/11/02
				EP	1256045 A	13/11/02
				EP	1256047 A	13/11/02
				EP	1256048 A	13/11/02
				EP	1256049 A	13/11/02
				EP	1256084 A	13/11/02
				EP	1256088 A	13/11/02
				EP	1256090 A	13/11/02
				EP	1256091 A	13/11/02
				EP	1257965 A	20/11/02
				EP	1264270 A	11/12/02
				EP	1266347 A	18/12/02
				EP	1269405 A	02/01/03
				US	2001033293 A	25/10/01
				WO	0161449 A	23/08/01
				WO	0161450 A	23/08/01
				WO	0161451 A	23/08/01
				WO	0161452 A	23/08/01
				WO	0161453 A	23/08/01
				WO	0161623 A	23/08/01
				WO	0161625 A	23/08/01
				WO	0161629 A	23/08/01
				WO	0161630 A	23/08/01
				WO	0161631 A	23/08/01
				WO	0161632 A	23/08/01
				WO	0161635 A	23/08/01

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00241

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	0161625	A2	23/08/01	AU	3025501 A	27/08/01
				AU	3171601 A	27/08/01
				AU	3171701 A	27/08/01
				AU	3171801 A	27/08/01
				AU	3374901 A	27/08/01
				AU	3545901 A	27/08/01
				AU	3925401 A	27/08/01
				AU	3925501 A	27/08/01
				AU	4060601 A	27/08/01
				AU	4060701 A	27/08/01
				AU	4060801 A	27/08/01
				AU	5031001 A	27/08/01
				AU	5463301 A	27/08/01
				EP	1256044 A	13/11/02
				EP	1256045 A	13/11/02
				EP	1256047 A	13/11/02
				EP	1256048 A	13/11/02
				EP	1256049 A	13/11/02
				EP	1256084 A	13/11/02
				EP	1256088 A	13/11/02
				EP	1256090 A	13/11/02
				EP	1256091 A	13/11/02
				EP	1257965 A	20/11/02
				EP	1264270 A	11/12/02
				EP	1266347 A	18/12/02
				EP	1269405 A	02/01/03
				US	2001033293 A	25/10/01
				WO	0161449 A	23/08/01
				WO	0161450 A	23/08/01
				WO	0161451 A	23/08/01
				WO	0161452 A	23/08/01
				WO	0161453 A	23/08/01
				WO	0161623 A	23/08/01
				WO	0161629 A	23/08/01
				WO	0161630 A	23/08/01
				WO	0161631 A	23/08/01
				WO	0161632 A	23/08/01
				WO	0161635 A	23/08/01
				WO	0161636 A	23/08/01
-----						
US	6188392	B1	13/02/01	NONE		
-----						

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00241

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	0161451	A2	23/08/01	AU	3025501 A	27/08/01
				AU	3171601 A	27/08/01
				AU	3171701 A	27/08/01
				AU	3171801 A	27/08/01
				AU	3374901 A	27/08/01
				AU	3545901 A	27/08/01
				AU	3925401 A	27/08/01
				AU	3925501 A	27/08/01
				AU	4060601 A	27/08/01
				AU	4060701 A	27/08/01
				AU	4060801 A	27/08/01
				AU	5031001 A	27/08/01
				AU	5463301 A	27/08/01
				EP	1256044 A	13/11/02
				EP	1256045 A	13/11/02
				EP	1256047 A	13/11/02
				EP	1256048 A	13/11/02
				EP	1256049 A	13/11/02
				EP	1256084 A	13/11/02
				EP	1256088 A	13/11/02
				EP	1256090 A	13/11/02
				EP	1256091 A	13/11/02
				EP	1257965 A	20/11/02
				EP	1264270 A	11/12/02
				EP	1266347 A	18/12/02
				EP	1269405 A	02/01/03
				US	2001033293 A	25/10/01
				WO	0161449 A	23/08/01
				WO	0161450 A	23/08/01
				WO	0161452 A	23/08/01
				WO	0161453 A	23/08/01
				WO	0161623 A	23/08/01
				WO	0161625 A	23/08/01
				WO	0161629 A	23/08/01
				WO	0161630 A	23/08/01
				WO	0161631 A	23/08/01
				WO	0161632 A	23/08/01
				WO	0161635 A	23/08/01
				WO	0161636 A	23/08/01
-----						
US	6417845	B1	09/07/02	NONE		
-----						